

02-18-00

A

COMMISSIONER OF PATENTS & TRADEMARKS
WASHINGTON, D.C. 20231

ATTORNEY DOCKET NO. 102001-200

Page 1 of 3

CERTIFICATION UNDER 37 C.F.R. § 1.10

I hereby certify that this New Application Transmittal and the documents referred to as enclosed therein are being deposited with the United States Postal Service on this date 17 FEB 2000 in an envelope as "Express Mail Post Office to Addressee" Mailing Label No. EL516724164US to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Todd E. Garabedian
Name of Person Mailing Paper

Todd E. Garabedian
Signature of Person Mailing Paper

APPLICATION TRANSMITTAL UNDER 37 C.F.R. § 1.53

Transmitted herewith for filing under 37 C.F.R. § 1.53 is the patent application of:

Inventor(s): WILLIAM L. O'MEARA, JONATHON M. HOWARD,
ANTONIO F. GONZALEZ and JOHN J. WILLIAMSON

for: **PERFORATED PROPELLANT COMPOSITION AND METHOD OF MANUFACTURING SAME**

1. Type of Application

☒ Original ☐ Continuation ☐ Divisional
☐ Continuation-In-Part

2. Benefit of Prior Foreign Application(s) (35 U.S.C. § 119)

☐ The new application being transmitted claims the benefit of
☐ prior foreign application serial no. _____, filed on
_____ in _____ (country); or
☐ PCT international application designating at least one country
other than the U.S. application Serial no. _____, filed on
_____.

A certified copy is ☐ enclosed or ☐ on file in the prior application.

3. Benefit of Prior U.S. Application(s) (35 U.S.C. § 120)

☒ The new application being transmitted claims the benefit of prior copending U.S. application(s):
Serial No. 60/121,208, filed on February 23, 1999;

4. Papers Enclosed Which Are Required for Filing Under 37 C.F.R. 1.53(b)

[14]	page(s) of Specification
[6]	page(s) of Claims, having <u>18</u> claims, including <u>5</u> independent and <u>13</u> dependent claims
[1]	page(s) of Abstract
[1]	sheet(s) of <input type="checkbox"/> formal <input checked="" type="checkbox"/> informal Drawings

jc557 U.S. PTO
02/17/00

jc525 U.S. PTO
09/505501
02/17/00

0505501 021700

5. Additional Papers Enclosed

- ☐ Preliminary Amendment
☒ Information Disclosure Statement
☒ Form PTO-1449
☒ Copies of Cited Art
☒ Other Information Disclosure Letter

Declaration

6. An [un]signed declaration is ☒ enclosed ☐ not enclosed.

7. Assignment

☐ Enclosed is a recordation form and an assignment of the invention to _____.

8. Small Entity Status

- ☐ A verified statement claiming small entity status:
☐ is enclosed.
☐ was filed in prior application _____ and such status is still proper and desired (copy enclosed).

9. Fee Calculation (37 C.F.R. § 1.16)

CLAIMS AS FILED					
	Number Filed	Number Extra	Rate	Basic Fee	\$ 690.00
Total Claims	18	-20	-0-	\$18.00	\$ 0.00
Independent claims	5	-3	-2-	\$78.00	\$ 156.00
Multiple Dependent claims, if any:				\$260.00	-0-
Total					\$ 846.00
Reduction for small entity by 50%					\$ 0.00
TOTAL FILING FEE					\$ 846.00

10. Method of Payment of Fees

- ☐ Check in the amount of \$
☒ Charge Account No. 23-1665 in the amount of \$846.00.


11. Authorization to Charge Additional Fees

The Commissioner is hereby authorized to charge any additional fees which may be required under 37 C.F.R. §§ 1.16 and 1.17, or credit any overpayment to Account No. 23-1665.

12. Correspondence

Please address all correspondence to:

Todd E. Garabedian, Ph.D.
WIGGIN & DANA
One Century Tower
New Haven, CT 06508-1832

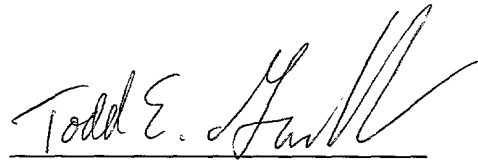

Todd E. Garabedian, Ph.D.
Reg. No. 39,197

WIGGIN & DANA
One Century Tower
New Haven, CT 06508-1832
Tel. (203) 498-4400

Date: 17 FEB 2000

004 FEB 17 2000 10 55 55

102001-200

PERFORATED PROPELLANT AND
METHOD OF MANUFACTURING SAME

This application claims the benefit of Provisional
Application Serial No. 60/121,208 filed on February 23, 1999.

BACKGROUND OF THE INVENTION

1. Field of the Invention

This invention relates to a propellant composition made from a lacquer and processed to form hollow propellant grains that are useful for ammunition rounds. More particularly, the invention is directed to a low viscosity lacquer that is continuously processed by extrusion to form hollow hardened propellant grains in a liquid slurry.

2. Description of Related Art

Perforated propellant grains are generally produced by extruding lacquers having between 0 and 20% by weight of solvent. This method of production requires a pressure in the range of between about 1000 and 5000 psi to extrude the lacquer through an extrusion die assembly, and requires large quantities

of energy and expensive equipment. The following U.S. Patents are representative of the state of the art.

United States Patent No. 5,821,449 entitled, "Propellant grain geometry for controlling ullage and increasing flame permeability" that issued on October 13, 1998 discloses hollow grain propellants for use in lightweight training rounds.

United States Patent No. 4,841,863 entitled, "Saboted, light armour penetrator round with improved powder mix" that issued on June 27, 1989 discloses propellant in the form of spheroidal (substantially spherical) powders and recites that a batch process for the manufacture of spherical powders is disclosed in United States patent number 2,027,114 and a continuous process in United States patent number 3,679,782.

United States Patent Number 5,524,544 entitled, "Nitrocellulose propellant containing a cellulosic burn rate modifier" that issued on June 11, 1996 and United States Patent Number 5,510,062 entitled, "Method of producing a nitrocellulose propellant containing a cellulosic burn rate modifier infiltrated therein that issued on April 23, 1996 disclose a solvent process for the manufacture of propellant grains where a burn rate deterrent is gradationally dispersed within the propellant with the greatest concentration of deterrent at the particulate periphery.

United States patent numbers 2,027,114; 3,679,782;
4,841,863; 5,510,062; 5,524,544 and 5,821,449 are all
incorporated by reference in their entireties herein.

Accordingly, what is needed in the art is a lacquer
5 composition and method of manufacturing that efficiently
produces perforated propellant grains in a safe and economical
manner, and at a lower extrusion pressure than presently used.
The present invention is believed to be an answer to that need.

10 SUMMARY OF THE INVENTION

In one aspect, the present invention is directed to a
propellant composition made from a lacquer, the lacquer
comprising: (a) from about 15 to about 70 wt% of an organic
solvent; (b) from about 0.1 to about 2.5 wt% of a stabilizer;
15 (c) optionally, from about 0% to about 40 wt% of an energetic
plasticizer; (d) optionally, from about 0 to about 10 wt% of a
nonenergetic plasticizer; (e) optionally, from about 0 to about
10 wt% water; (f) optionally, from about 0 to about 15 wt% of
additional additives; and balance being nitrocellulose; all
20 weight percents based on the total weight of the composition,
and wherein the lacquer has a viscosity of less than 10 million
centipoise when processed.

In another aspect, the present invention is directed to a
propellant composition made from a lacquer, the lacquer

consisting essentially of: (a) from about 30 to about 65 wt% of an organic solvent selected from the group consisting of ethyl acetate, ether, acetone, and combinations thereof; (b) from about 0.25 to about 1.5 wt% of a stabilizer selected from the group consisting of diphenylamine, ethyl centralite, diethyldiphenylurea, 2-nitrodiphenylamine, N-nitrosodiphenylamine, and combinations thereof; (c) optionally, from about 5% to about 25 wt% of nitroglycerin as an energetic plasticizer; (d) optionally, from about 0 to about 3 wt% of a nonenergetic plasticizer selected from the group consisting of dibutylphthalate, adipate esters, and combinations thereof; (e) optionally, from about from about 0 to about 4 wt% water; (f) optionally, from about 0 to about 15 wt% of additional additives selected from the group consisting of lubricants; coolants; barrel wear additives; flash suppressants; decoppering agents; energetic solids, and combinations thereof; and balance being nitrocellulose; wherein all weight percents are based on the total weight of the composition, and wherein the lacquer has a viscosity of between 1 million and 3 million centipoise.

In another aspect, the present invention is directed to a method for manufacturing perforated propellant grains, comprising the steps of: extruding a propellant lacquer through an extrusion die assembly to form one or more propellant lacquer strands, the extrusion die assembly having a plurality of holes,

each of the holes having at least one pin tip positioned therein, the propellant lacquer comprising: (a) from about 15 to about 70 wt% of an organic solvent; (b) from about 0.1 to about 2.5 wt% of a stabilizer; (c) optionally, from about 0% to about 40 wt% of an energetic plasticizer; (d) optionally, from about 0 to about 10 wt% of a nonenergetic plasticizer; (e) optionally, from about 0 to about 10 wt% water; (f) optionally, from about 0 to about 15 wt% of additional additives; and balance being nitrocellulose; all weight percents based on the total weight of the composition, and wherein the lacquer has an extrusion viscosity of less than 10 million centipoise; cutting the propellant lacquer strand to a desired dimension to form perforated propellant grains; suspending the perforated propellant grains in a water based liquor; removing the organic solvent and water from the perforated propellant grains; and hardening the perforated propellant grains.

In another aspect, the present invention is directed to a propellant grain having outwardly extending ridges.

In another aspect, the present invention is directed to a propellant grain having an ellipsoidal cross section.

These and other aspects will be more fully understood from the following detailed description of the invention.

DESCRIPTION OF THE DRAWINGS

The invention will be more fully understood from the following detailed description taken in conjunction with the accompanying drawings in which:

5 Fig. 1A shows a hollow, tubular portion of the propellant grains of the invention having a single internal perforation;

 Fig. 1B shows the hollow, tubular portion of Fig. 1A in a flattened state;

10 Fig. 2A shows an alternative embodiment of the propellant grains of the invention having a plurality of internal perforations;

 Fig. 2B shows the alternative embodiment of Fig. 2A in a flattened state; and

15 Fig. 3 shows another alternative embodiment of the propellant grains of the invention having outwardly extending ridges.

DETAILED DESCRIPTION OF THE INVENTION

20 It has now been found that perforated propellant grains may be manufactured continuously from a specific lacquer composition in a safe, cost-effective, and efficient manner. The continuous preparation of a perforated propellant produces a strand having a generally cylindrical shape with one or more inner concentric hollow cylinders (termed perforations) arranged parallel to the

longitudinal axis of the strand. The produced strands may be cut to desired sizes, may be flattened to form ellipsoid shapes, or may be formed to specific configurations (e.g., with outwardly extending ridges). The cut strands (grains) are made from a composition that requires less pressure to extrude during the manufacturing process, thereby considerably reducing energy and equipment costs.

As defined herein, the term "perforation" refers to a tubular space (hollow cylinder) oriented parallel to the longitudinal axis of the strand or grain.

As indicated above, the propellant of the present invention is made from a lacquer comprising (a) an organic solvent; (b) a stabilizer; (c) optionally, an energetic plasticizer; (d) optionally, a nonenergetic plasticizer; (e) optionally, water; and (f) optionally, additional additives; and the balance being nitrocellulose. Each of these components is discussed in detail below.

Solvents that are useful in the composition and method of the present invention include ethyl acetate, ether, acetone, and combinations thereof. A preferred solvent is ethyl acetate. Preferably, the amount of solvent used in the composition of the invention ranges from about 15 to about 70 wt%, and more preferably from about 30 to about 65 wt%, based on the total weight of the composition.

The lacquer composition of the invention also includes one or more stabilizers. Examples of suitable stabilizers include diphenylamine, ethyl centralite, diethyldiphenylurea, 2-nitrodiphenylamine, N-nitrosodiphenylamine, and combinations thereof. Useful amounts of the stabilizers in the composition of the present invention generally range from 0.1 wt% to about 2.5 wt%, and more preferably from about 0.25 wt% to about 1.5 wt%, based on the total weight of the composition.

The balance of the lacquer composition of the invention is nitrocellulose. The nitrocellulose used in the present invention may be in any form. However, in a preferred embodiment, the nitrocellulose is completely dissolved in one or more solvents.

Optionally, the lacquer composition of the invention includes an energetic plasticizer such as nitroglycerin, ethylene glycol esters, methylene glycols, glycol esters, formyl acetal (bis(2,2-dinitropropyl)formal acetal) and combinations thereof. If such an energetic plasticizer is included in the composition, a useful working range is from about 0% to about 40 wt%, and more preferably from about 5 to about 25 wt%, based on the total weight of the composition.

Optionally, the lacquer composition of the invention also includes a nonenergetic plasticizer such as dibutylphthalate, adipate esters, and combinations thereof. A preferred

nonenergetic plasticizer is DBP (dibutylphthlate). Generally, the nonenergetic plasticizer component comprises from about 0 to about 10 wt%, and more preferably from about 0 wt% to about 3 wt%, based on the total weight of the composition.

5 The lacquer composition of the invention may also include optional additives, including lubricants, such as graphite; coolants, such as magnesium carbonate; barrel wear additives, such as tin dioxide, titanium dioxide, calcium bicarbonate, and the like; flash suppressants, such as potassium salts; decoppering agents, such as bismuth and tin dioxides; and
10 energetic solids known in the art, such as RDX, HMX, CL20, nitroguanidine, and the like.

Other additives may be present in amounts effective for desired results. Such additives such as deterrents may
15 influence burn rate, burn temperature, extrusion performance or other properties of manufacture or use.

The lacquer composition of the present invention is prepared by mixing the above ingredients in an agitated kettle until a homogeneous lacquer is produced.

20 An aqueous process for the manufacture of perforated propellant begins with the formation of a propellant lacquer as described above. The extrusion viscosity of the lacquer should be less than 10 million centipoise, and is preferably between 1 million and 3 million centipoise. At this viscosity, the

lacquer of the invention may be pumped through a perforated extrusion die assembly as described below at a pressure of between 30 and 200 pounds per square inch. This method is to be contrasted with conventionally extruded lacquers having between 0 and 15% by weight of solvent that require a pressure in the range of between about 1000 and 5000 psi to extrude.

One suitable lacquer has the composition, by weight, of:

Component	Weight %
Organic solvent	15% - 70%
Energetic Plasticizer	0 - 40%
Stabilizer	0.1% - 2.5%
Nonenergetic Plasticizer	0 - 10%
Water	0 - 10%
Nitrocellulose	balance

In a preferred embodiment, the lacquer has the composition, by weight, of:

Component	Weight %
Ethyl Acetate	30% - 65%
Nitroglycerin	5% - 25%
Stabilizer	0.25% - 1.5%
Dibutylphthlate	0 - 3%
Water	1% - 4%
Nitrocellulose	balance

Without wishing to be bound by any particular theory, it is believed that the lacquers formed from these components function as a Newtonian shear thinning fluid. The lacquer made according to the method of the invention has a low viscosity and is easily

pumped through the extrusion die assembly and thereby requiring less energy and equipment costs.

In order to produce the perforated propellant, the lacquer is pumped through an extrusion die assembly and into an aqueous solution, referred to as liquor. The extrusion die assembly has a plurality of die holes, each of which has at least one pin tip positioned therein to produce grains having hollow cores (perforations). The liquor is preferably water-based, and generally maintained at a temperature of between about 35 and 80°C. Up to about 6% by weight of a salt (a dewatering agent) and up to about 6% by weight of a surfactant (an antiagglomerating agent) may be added to the liquor. A suitable salt is sodium sulfate, and a suitable surfactant is a colloid. Rotating knives adjacent to the base surface of the plate cut the lacquer strand into perforated cylinders of lengths which are controlled by the rate of revolution of the rotating knives and/or by controlling the pump speed. Generally, the cut perforated propellant grains have a length-to-diameter ratio of approximately 2:1. The liquor is then used to safely transport the perforated propellant through both the dewatering and solvent removal and grain hardening stages.

To control dewatering, temperature, time, residual solvent and salt concentration in the liquor are controlled. Typically dewatering involves heating the liquor to a temperature of

between about 35°C and 80°C, and preferably of between 40°C and 60°C.

After dewatering, and/or while dewatering, the perforated grains then go through a solvent removal process. This process
5 can begin with the addition of solventless liquor to the system. This step dilutes the solvent in the liquor and results in solvent removal (leaching) from the perforated grains at a controllable rate. This method of solvent removal can be used to remove enough solvent such that the perforated grains become
40 tough and leathery, however in some cases it may be desirable to leave up to about 40% solvent by weight in the grained material. At this stage, the perforated grains can be heated without softening to the point of deformation.

To harden the grains, the temperature of the perforated grains and liquor is increased and/or vacuum is applied until the solvent is removed to a level sufficient enough for storage. Heating may be up to any temperature up to or less than the boiling point of water, and is generally dependent on whether a vacuum is employed. At atmospheric pressure, a temperature of
20 up to about 99°C may be utilized. At 11.5 inches of pressure, the maximum temperature is about 86°C.

The perforated grains can be further impregnated or coated, such as with nitroglycerin (an energetic plasticizer) or with a deterrent, and dried for use to form the finished propellant.

Changing the shape of the die hole of the extrusion die assembly changes the outer surface configuration of the grains and influences burn rate and performance. Exemplary shapes for propellant grains are illustrated in Figs. 1A, 1B, 2A, 2B, and

3. Fig. 1A shows a grain having a circular cross section and a perforation 40 centered in the strand cross section and running parallel to the longitudinal axis of the strand. The grain shown in Fig. 1A can be compressed to form a grain having an ellipsoidal cross section as shown in Fig. 1B. The flattened propellant grain with ellipsoidal cross section of Fig. 1B, provides for increased packing density for increased propellant weight capability when compared to the grain with a circular cross section of Fig. 1A. The Fig. 1B shape also has utility to decrease temperature sensitivity (the tendency of a propellant to burn quicker at higher temperatures and slower at lower temperatures).

Figs. 2A and 2B show the addition of multiple perforations to influence burn characteristics of the grains. In this embodiment, the extrusion die assembly would have a plurality of pin tips to form the desired number of perforations through the strand. The configuration of Fig. 2B having an ellipsoidal cross section is made in a similar manner to the grain shown in Fig. 1B.

Fig. 3 illustrates a ridged, perforated, propellant grain with a geometry that provides for a low packing density for a lower propellant charge weight and also fills a cartridge volume, reducing ullage. The ridged propellant grains are characterized by superior ignition and flame permeability when compared to similarly configured perforated propellants without the ridges. The reduction in ullage provides enhanced safety and ballistic uniformity.

While the invention has been described in combination with embodiments thereof, it is evident that many alternatives, modifications and variations will be apparent to those skilled in the art in light of the foregoing description. Accordingly, it is intended to embrace all such alternatives, modifications and variations as fall within the spirit and broad scope of the appended claims. All patent applications, patents, and other publications cited herein are incorporated by reference in their entireties.

CLAIMS

WHAT IS CLAIMED IS:

5 1. A propellant composition made from a lacquer, said lacquer comprising:

(a) from about 15 to about 70 wt% of an organic solvent;

(b) from about 0.1 to about 2.5 wt% of a stabilizer;

(c) optionally, from about 0% to about 40 wt% of an
10 energetic plasticizer;

(d) optionally, from about 0 to about 10 wt% of a
nonenergetic plasticizer;

(e) optionally, from about 0 to about 10 wt% water;

(f) optionally, from about 0 to about 15 wt% of additional
15 additives; and

balance being nitrocellulose; all weight percents based on
the total weight of said composition, and wherein said lacquer
has a viscosity of less than 10 million centipoise when
processed.

20 2. The propellant composition of claim 1, wherein said organic solvent is selected from the group consisting of ethyl acetate, ether, acetone, and combinations thereof.

3. The propellant composition of claim 1, wherein said stabilizer is selected from the group consisting of diphenylamine, ethyl centralite, diethyldiphenylurea, 2-nitrodiphenylamine, N-nitrosodiphenylamine, and combinations thereof.

4. The propellant composition of claim 1, wherein said optional energetic plasticizer is selected from the group consisting of nitroglycerin, ethylene glycol esters, methylene glycols, glycol esters, bis(2,2-dinitropropyl)formal acetal ,and combinations thereof.

5. The propellant composition of claim 1, wherein said optional nonenergetic plasticizer is selected from the group consisting of dibutylphthlate, adipate esters, and combinations thereof.

6. The propellant composition of claim 1, wherein said optional additional additives are selected from the group consisting of lubricants; coolants; barrel wear additives; flash suppressants; decoppering agents; energetic solids, and combinations thereof.

7. A propellant composition made from a lacquer, said lacquer consisting essentially of:

(a) from about 30 to about 65 wt% of an organic solvent selected from the group consisting of ethyl acetate, ether, acetone, and combinations thereof;

(b) from about 0.25 to about 1.5 wt% of a stabilizer selected from the group consisting of diphenylamine, ethyl centralite, diethyldiphenylurea, 2-nitrodiphenylamine, N-nitrosodiphenylamine, and combinations thereof;

(c) optionally, from about 5% to about 25 wt% of nitroglycerin as an energetic plasticizer;

(d) optionally, from about 0 to about 3 wt% of a nonenergetic plasticizer selected from the group consisting of dibutylphthalate, adipate esters, and combinations thereof;

(e) optionally, from about from about 0 to about 4 wt% water;

(f) optionally, from about 0 to about 15 wt% of additional additives selected from the group consisting of lubricants; coolants; barrel wear additives; flash suppressants; decoppering agents; energetic solids, and combinations thereof; and

balance being nitrocellulose;

wherein all weight percents are based on the total weight of said composition, and wherein said lacquer has a viscosity of between 1 million and 3 million centipoise.

8. A method for manufacturing perforated propellant grains,
comprising the steps of:

extruding a propellant lacquer through an extrusion die
5 assembly to form one or more propellant lacquer strands, said
extrusion die assembly having a plurality of holes, each of said
holes having at least one pin tip positioned therein, said
propellant lacquer comprising:

- (a) from about 15 to about 70 wt% of an organic solvent;
- (b) from about 0.1 to about 2.5 wt% of a stabilizer;
- (c) optionally, from about 0% to about 40 wt% of an
energetic plasticizer;
- (d) optionally, from about 0 to about 10 wt% of a
nonenergetic plasticizer;
- (e) optionally, from about 0 to about 10 wt% water;
- (f) optionally, from about 0 to about 15 wt% of additional
additives; and

balance being nitrocellulose; all weight percents based on
the total weight of said composition, and wherein said lacquer
20 has an extrusion viscosity of less than 10 million centipoise;

cutting said propellant lacquer strand to a desired
dimension to form perforated propellant grains;

suspending said perforated propellant grains in a water
based liquor;

removing said organic solvent and water from said
perforated propellant grains; and

hardening said perforated propellant grains.

5 9. The method of claim 8, wherein said perforated propellant
grains have a circular cross-section.

10. The method of claim 8, further comprising the step of
compressing said perforated propellant grains to form perforated
10 propellant grains having an ellipsoidal cross section.

11. The method of claim 8, wherein said plurality of holes and
said pin tips of said extrusion die assembly are arranged to
form perforated propellant grains having outwardly extending
ridges.

12. The method of claim 8, wherein said organic solvent is
selected from the group consisting of ethyl acetate, ether,
acetone, and combinations thereof.

20

13. The method of claim 8, wherein said stabilizer is selected
from the group consisting of diphenylamine, ethyl centralite,
diethyldiphenylurea, 2-nitrodiphenylamine, N-
nitrosodiphenylamine, and combinations thereof.

14. The method of claim 8, wherein said optional energetic plasticizer is selected from the group consisting of nitroglycerin, ethylene glycol esters, methylene glycols, glycol esters, bis(2,2-dinitropropyl)formal acetal, and combinations thereof.

15. The method of claim 8, wherein said optional nonenergetic plasticizer is selected from the group consisting of dibutylphthlate, adipate esters, and combinations thereof.

16. The method of claim 8,, wherein said optional additional additives are selected from the group consisting of lubricants; coolants; barrel wear additives; flash suppressants; decoppering agents; energetic solids, and combinations thereof.

17. A perforated propellant grain having outwardly extending ridges.

18. A perforated propellant grain having an ellipsoidal cross section.

PERFORATED PROPELLANT COMPOSITION AND
METHOD OF MANUFACTURING SAME

5

ABSTRACT OF THE DISCLOSURE

The present invention is directed to a propellant composition made from a lacquer, the lacquer comprising: (a) from about 15 to about 70 wt% of an organic solvent; (b) from about 0.1 to about 2.5 wt% of a stabilizer; (c) optionally, from about 0% to about 40 wt% of an energetic plasticizer; (d) optionally, from about 0 to about 10 wt% of a nonenergetic plasticizer; (e) optionally, from about 0 to about 10 wt% water; (f) optionally, from about 0 to about 15 wt% of additional additives; and balance being nitrocellulose; all weight percents based on the total weight of the composition, and wherein the lacquer has a viscosity of less than 10 million centipoise when processed. The present invention is also directed to an efficient and safe method of making perforated propellant grains using the above lacquer composition, as well as propellant grains having ellipsoidal cross sections or outwardly extending ridges.

43ZR01!.DOC\11719\302\191799.01

25

Fig 1A




Fig 1B




Fig. 2A

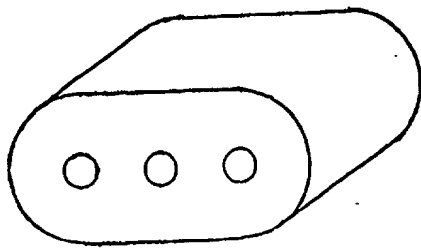


Fig. 2B


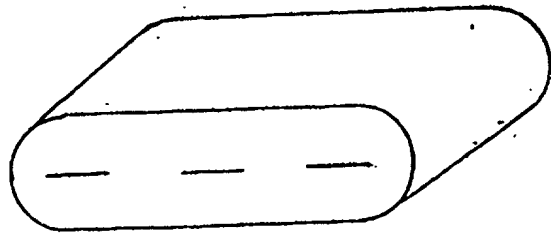


Fig. 3

002F20-T0350560

COMBINED DECLARATION AND POWER OF ATTORNEY
FOR JOINT INVENTORS

1. As below named joint inventors, we hereby declare that our addresses and citizenship are as stated below next to our names. We believe we are the original, first, and joint inventors of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**PERFORATED PROPELLANT COMPOSITION AND
METHOD OF MANUFACTURING SAME**

the specification of which:

☒ is attached or

☐ was filed on _____ as Serial No. _____ and not amended.

2. We hereby state that we have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.
3. We acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Section 1.56(a) of Title 37, Code of Federal Regulations.
4. ☐ Because this is a continuation-in-part application, we acknowledge our duty to disclose to the Office all information known to us to be material to the patentability as defined in 37 C.F.R. § 1.56 which has become available between the filing date of the prior application and the filing date of this continuation-in-part application.
5. ☐ We hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by us on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

004460106550

Country	Application Serial No.	Date of Filing (day, mo., yr.)	Priority Claimed under 35 U.S.C. § 119	
			<input type="checkbox"/> Yes	<input type="checkbox"/> No
			<input type="checkbox"/> Yes	<input type="checkbox"/> No
			<input type="checkbox"/> Yes	<input type="checkbox"/> No

6. [X] We hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, §112, We acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application(s) and the filing date of this application:

Application Serial No.	Filing Date	Status
60/121,208	February 23, 1999	Pending

7. We hereby declare that all statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.
8. As named inventors, we hereby appoint the following attorneys of Wiggin & Dana to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: Dale L. Carlson, Reg. No. 28,784; Todd E. Garabedian, Ph.D., Reg. No. 39,197; Gregory S. Rosenblatt, Reg. No. 32,489; William B. Slate, Reg. No. 37,328; and William A. Simons, Reg. No. 27,096.

9. Please send all correspondence to:

Todd E. Garabedian, Ph.D.
Wiggin & Dana
One Century Tower
New Haven, Connecticut 06508-1832
Telephone: (203) 498-4400

10. [] As named inventors, we hereby appoint the attorney listed in paragraph 9 as our domestic representative for the invention identified in paragraph 1 with full power of substitution and revocation, to transact all business in the U.S. Patent and Trademark Office and in the U.S. courts in connection therewith. He is also designated as domestic representative on whom process or notice of proceedings affecting the application or patents issuing therefrom may be served.

[] We hereby authorize the U.S. attorney named in paragraph 9 to accept and follow instruction from _____, as to any actions to be taken in the U.S. Patent and Trademark Office regarding this application without direct communication between the U.S. attorney and us. In the event of a change in the persons from whom instructions may be taken, we will notify the U.S. attorney.

Inventor Information:

Full name of first joint inventor: William L. O'Meara
Inventor's signature _____
Date _____ Citizenship: USA
Residence: 6709 Walden Circle, Tallahassee, Florida
Post Office Address: 6709 Walden Circle, Tallahassee, Florida

Full name of second joint inventor: Jonathon M. Howard
Inventor's signature _____
Date _____ Citizenship: USA
Residence 1562 Sprucewood Trail, Tallahassee, Florida
Post Office Address: 1562 Sprucewood Trail, Tallahassee, Florida

Full name of third joint inventor: Antonio F. Gonzalez
Inventor's signature _____
Date _____ Citizenship: USA
Residence 2784 Edenderry Drive, Tallahassee, Florida 32308
Post Office Address: 2784 Edenderry Drive, Tallahassee, Florida 32308

Full name of fourth joint inventor: John J. Williamson
Inventor's signature _____
Date _____ Citizenship: USA
Residence 3778 Bloxham Cutoff Road, Crawfordville, Florida 32327
Post Office Address: 3778 Bloxham Cutoff Road, Crawfordville, Florida 32327

This is the end of the listing of inventors.